
SIP:WISE

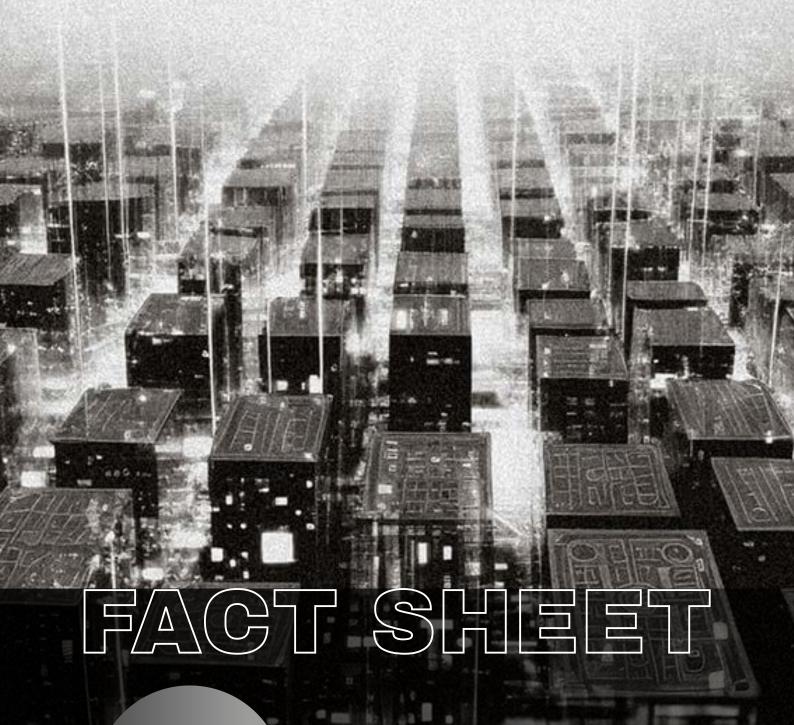

SIP:WISE

MG


The Media Gateway for Service Providers

## MG

# **Connecting IP Networks to Public Switched Networks**

The Sipwise Media Gateway, or MG, has been developed in close cooperation with Sangoma. It enables interoperability between IP and PSTN networks via high-density optical telephony, and Ethernet connections in a compact 1U form.



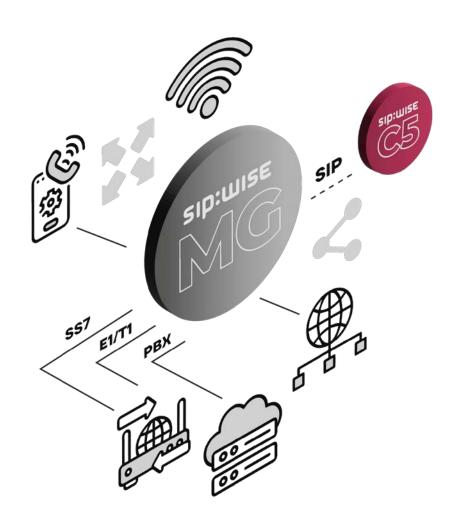

#### What the Sipwise MG can do

The MG transforms media and signaling to support efficient and reliable voice, fax and multimedia sessions for mobile and cloud-based applications. It secures sessions across IP and mixed network boundaries in support of service level agreements.



# MG PRODUCT OVERVIEW





#### **Deployment**

The Sipwise Media Gateway not only provides scalability within a small footprint, but also handles signaling and media in a single carrier-grade chassis and can deliver SIP services into SS7, SIGTRAN, PRI, and SIP-I networks.

The MG also manages sessions through capabilities that include SIP mediation, SIP-to-H.323 interworking, SIP back-to-back user agent (B2BUA), and IP-to-IP transcoding of voice and video for network access applications.

With its high density and versatility, Sipwise MG can help wireless and wired line service providers add new Value-Added Services (VAS) quickly and provide a clear migration path to an all-IP network. It is also an excellent option for retail, wholesale, and enhanced service VoIP deployments, as well as contact centers and mobile VAS.

Its NEBS-3 carrier-ready design uses independent network interfaces to separate transport, signaling and OAM&P for reliability and enhanced service availability.





### **MG FEATURES**



#### High Availability

Fast maintenance, such as hot-swappable power supplies, field-replaceable motherboard trays as well as graceful upgrades address the flexibility and ease of operation that carriers need. Moreover, it increases reliability in the field.

#### Scripting Capabilities

The Sipwise MG features
Sangoma's Programmable Protocol
Language (PPL), which allows rapid
implementation of SS7 ISUP variants
and other signaling changes.

#### Routing Features

- Call routing and translation based on ANI, DNIS, Generic Number (only translation is supported), Nature of Address (NOA)
- Algorithms include percentage-based routing and disposition by Cause Code
- Pre- and post-routing digit translations with wildcard support
- Multiple routing algorithms per trunk group or groups of trunks for IP-to-TDM and IP-to-IP and both A-law and µ-law conversions
- Pre-call announcement (branding)





### **MG FEATURES**



#### Transcoding

Integrated encryption and transcoding support for voice, video, tone and faxing eliminate the need to add separate hardware for supporting both security and transcoding requirements, helping to reduce the number of deployed network elements.

#### Scalability

The Sipwise MG is scalable from 50 to 2.250 simultaneous SIP sessions with multimedia transcoding, and 128 to 2016 channels of SS7 signaling. The scalable IP and TDM connectivity solution provide high performance on a small scale to help lower OPEX and CAPEX.

#### IP Bearer Features

- Coder support: AMR-NB, AMR-WB,
   G.711, G.723.1, G.729 A/B, G.726, G.722,
   GSM-FR, GSM-EFR, iLBC, RFC 4040
   Clear Channel
- Echo cancellation: G.168 128 ms tail length
- Voice activity detection and packet loss concealment
- Comfort noise generation
- T.38 real-time fax, T.38 G.711 interworking
- Fax/modem bypass
- Digit transmission via RFC 2833 (SIP)
- G.711 tones, SIP INFO, RFC 2833 interworking
- Secure RTP (SRTP) to RTP interworking (SIP audio media only)





SIPWISE COMPANY

# SPEAK WITH THE FUTURE, TODAY.

Empowering Telecom Operator and ISP businesses with advanced communications products.



**EFFICIENT** 



SIMPLE



INNOVATIVE



**PROFITABLE** 

Need help? Contact us now: count

SIP:WISE

Sipwise GmbH +43-1-252 152 3 sales@sipwise.com sipwise.com